


Material Specification

featuring TERRAZZO

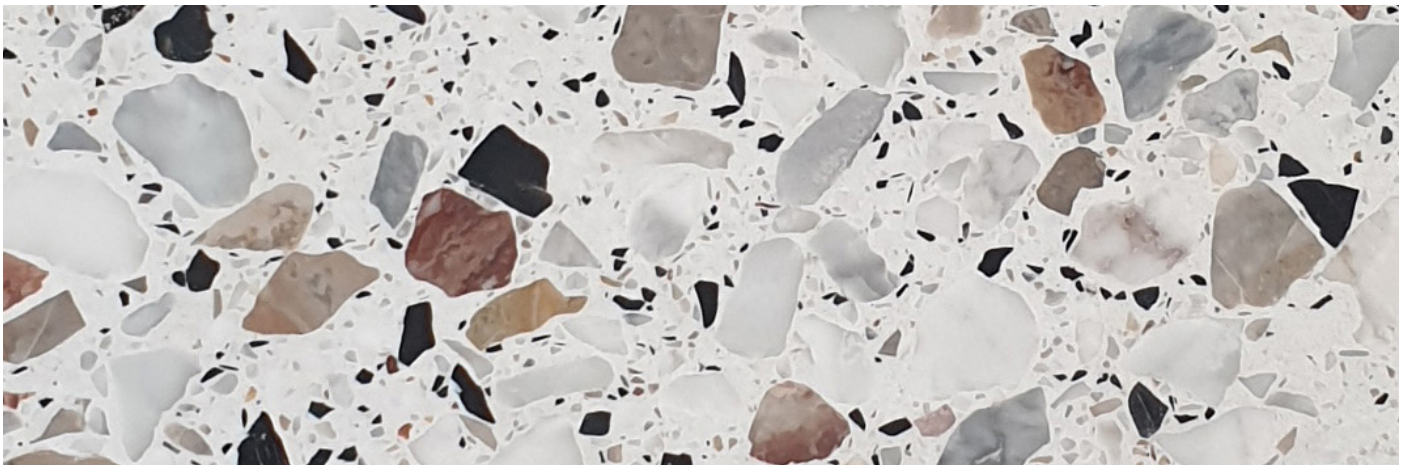

Material Specification **TERRAZZO**

The traditional art of Terrazzo has developed through advanced technologies such as vibro-compaction and vacuum using high quality natural aggregates such as marble, granite and quartz, which provide it's unique speckled look, in a cement or resin matrix.

Terrazzo is an exceedingly versatile contemporary material used for flooring, interior & exterior cladding, stair treads, bench-tops, furniture and other custom architectural solutions. Terrazzo is available in a variety of tile and slab formats, offering both consistency & design aesthetics to any project.

Collections

(Brochures available at request)

Palladian Range

Matrix : Resin Base

Tiles: 300x300mm, 600x300mm, 600x600mm, 600x1200mm, 900x400mm, 900x1200mm; 12mm or 20mm thick.

Slabs: 1830x1230mm, 20mm thick

Finishes: Honed, Polished, Aged, Satin, Bushhammered.

Venetian Range

Matrix : Cement Base

Standard Tiles: 100x100x12mm, 200x200x12mm, 250x250x13mm, 400x400x20mm, 600x600x20mm

Veneziana : 400x400mm, 600x600mm, 20mm thick

Slabs: 2450x1250mm, 20mm thick

Finish: Honed, Polished, Brushed & Antique.

Arcadia Range

Matrix : Cement Base

Tiles: 300x300mm, 400x400mm, 600x300mm, 600x600mm; 15/20mm thick.

Custom Sizes on request.

Slabs: 3050x1250mm or 3050x1450mm, 20mm thick

Finishes: Honed, Polished, Brushed, Sandblasted.

Baroque Range

Matrix : Cement Base

Tiles: 600x300mm, 600x600mm & 800x800mm; 15mm or 20mm thick.

Slabs: 2400x1600mm, 20mm thick

Finishes: Honed, Polished, Brushed, Sandblasted.

General Guidelines for Installation & Maintenance:

Adhesive: **Davco 2 Part Rapid** or equally approved.
Note; Minimise risk of Efflorescence by use of **Efflock** as an additive to water when used at any stage of the install process.

Sealer: **Sealers Plus Gold +** or equally approved.
Dip Sealing (six sided) with **Sealers Plus Ultra Block** is applicable to areas exposed to water such as shower walls and floors, pool and pond coping. Note: Sealing on completion with **Gold +** is still a requirement. Suggested to be resealed every 1-2 years.

Grout Specification: Ardex or Davco grout range, to be colour matched by client or designer.
Note; that the entire surface of the tile is also to be grouted.

Suggested Contractors: Cleaning, Sealing and Buffing on completion by the below contractors:

Nanoworx

P: 0403 321 982

E: sales@nanoworx.com.au

W: www.nanoworx.com.au

Sealwerx

P: 0400 362 360

E: sealwerxwa@bigpond.com

W: www.sealwerx.com.au

For technical guidelines on any other application, please contact our office for further advice.

